




# Wilson™ UH4000


Universal Hardness Tester



# Wilson® UH4000 - Universal Hardness Tester

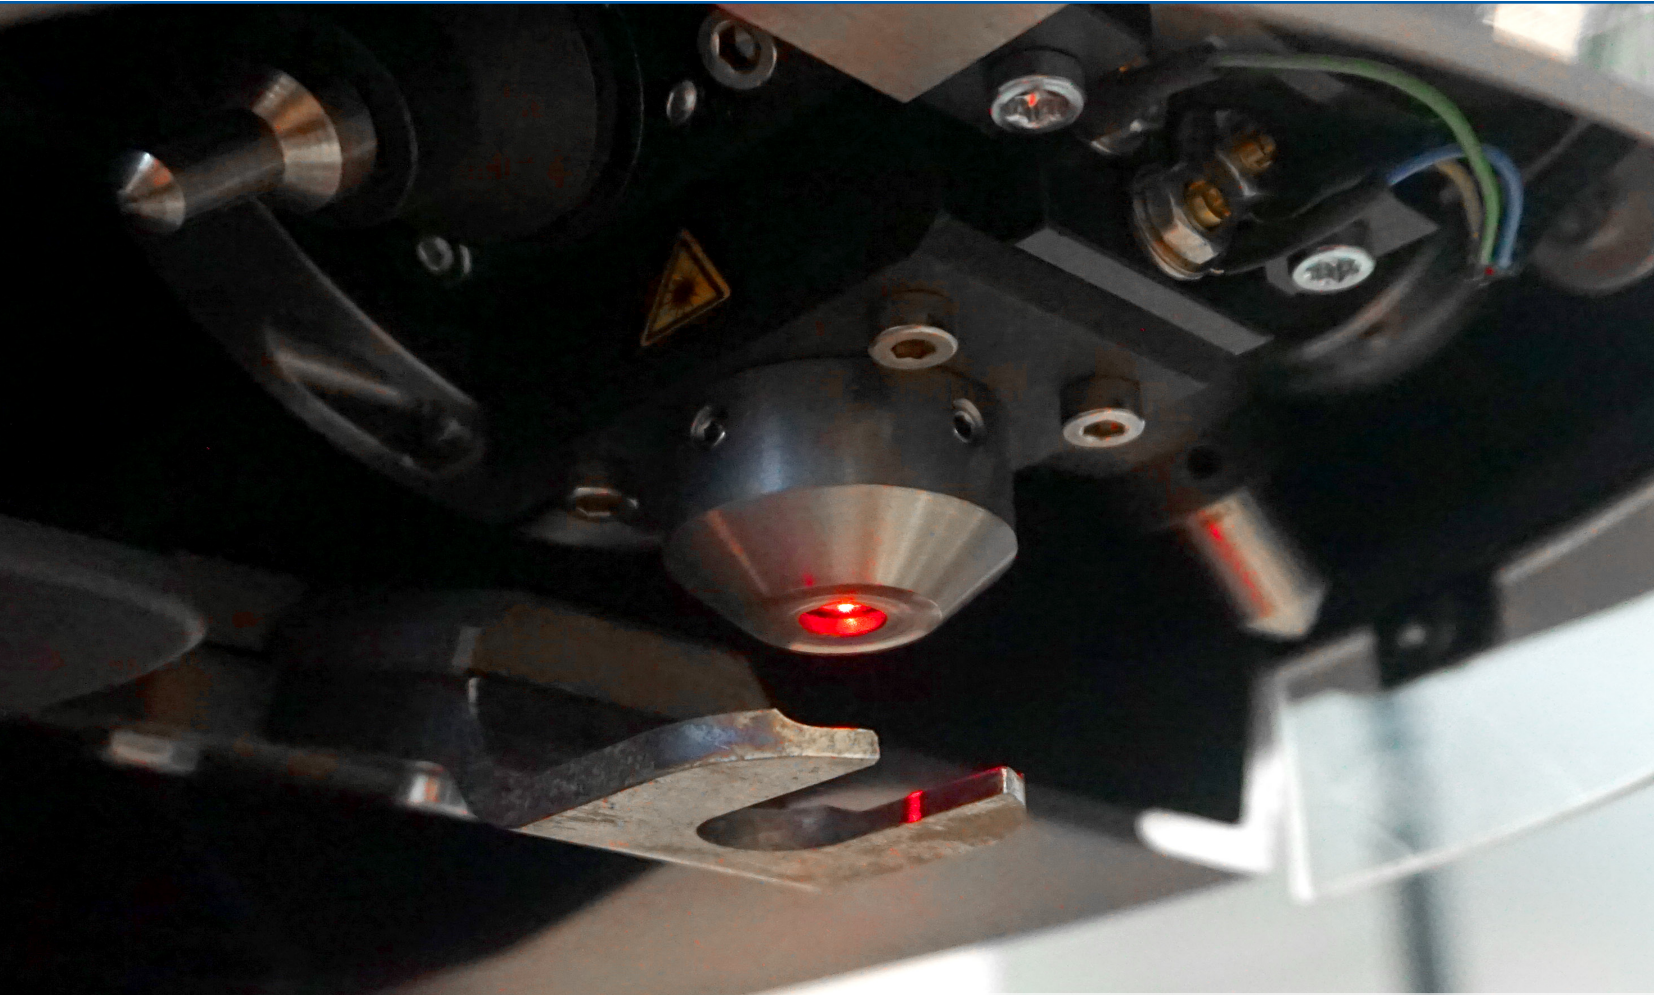


The *Ultimate*  
Universal  
Hardness Tester

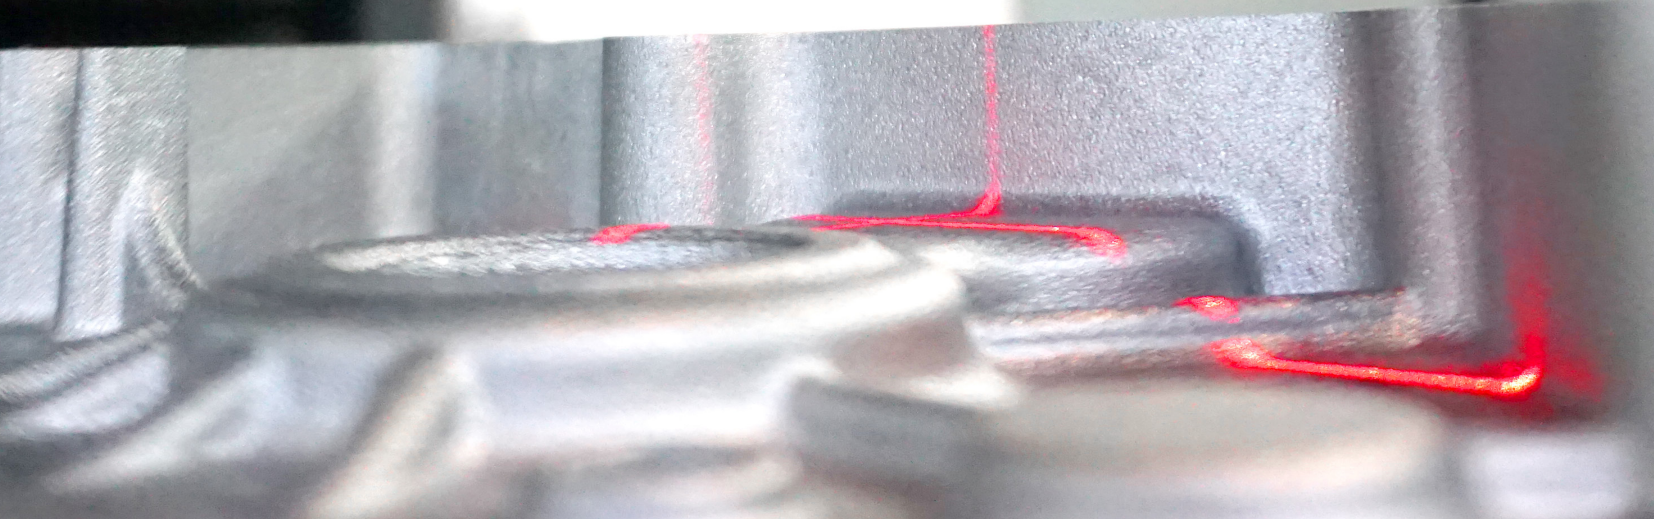



# Versatility for Any Environment

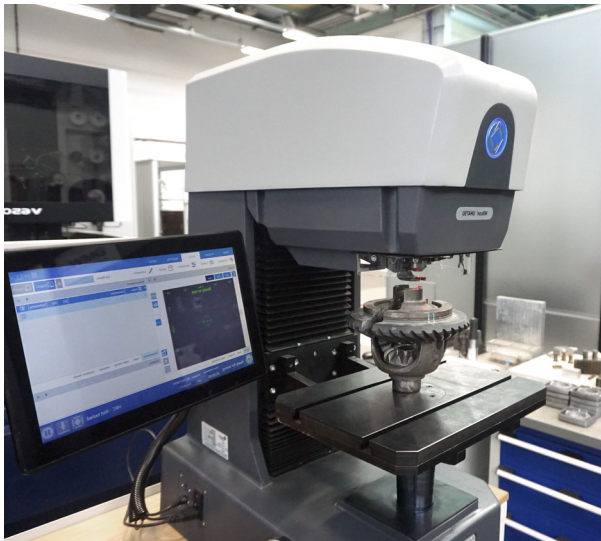

The Wilson® UH4000 series universal hardness tester is designed for high volume production labs and production floors. The UH4000 series is available in two load configurations, UH4250 and UH4750. Universal testers are designed to be capable of performing several hardness scales; in most cases, testing with higher loads (>5kgf).


A precise indenting system is a critical requirement for a hardness tester. The innovative and newly designed turret offers up to 8 slots, with configuration flexibility to house indenters, objectives or a positioning laser.

# Best in Class Optics & Software

The UH4000 ensures accurate results with best in class optics. All objectives have a long working distance, which minimizes the risk of colliding with test parts, avoids unintentional downtime and reduces service cost.


The optical measurement system is protected by a rigid aluminium casting to keep it safe from dust and dirt as well as prevent it from getting misaligned. A laser provides easy test location targeting and the ring light assists with measurement accuracy.

DiaMet™ hardness software assures accurate measurement of indentations with state of the art algorithms ensure auto-measure, illumination and focus. DiaMet is included in both configurations of the UH4000.

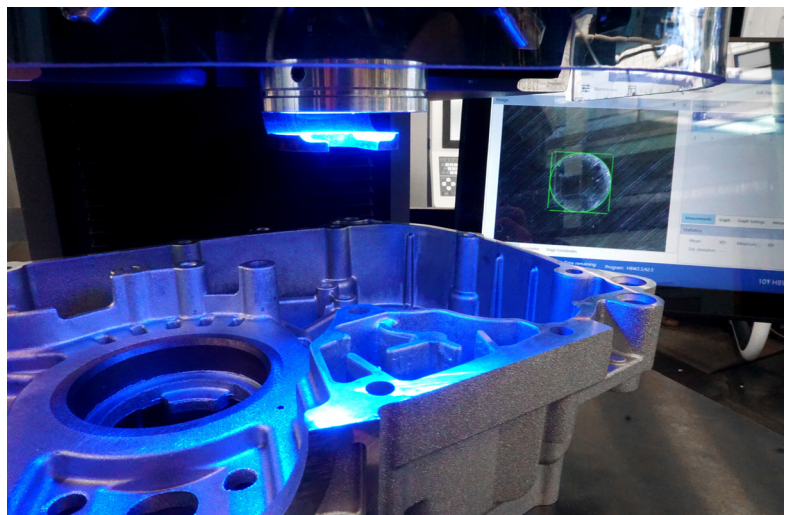

# Available in Two Load Scales

The UH4000 series Universal Hardness Tester is available in two load configurations. The UH4250 has a load range from 0.5 to 250kgf, whereas the UH4750 is available from 3 to 750kgf.

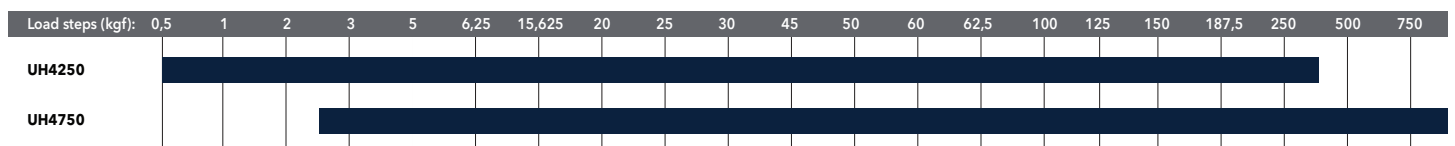

# Wilson® UH4000 Features

Due to its sturdy construction, the UH4000 is a reliable machine and suitable for rough workshop conditions. The innovative hardness tester features very fast testing cycles and a newly developed turret to hold several indenters and objectives. The operator can test to a variety of test methods without the need for manual indenter/objective changes. The frame is made from a solid casting, along with a sturdy turret cover to protect the turret assembly and the hardness measurement system against outer influences and collisions, with test pieces. The large T-slot stage and the weight capacity enables testing of heavy and big parts.

The UH4000 series suits the following applications and many more.

- Hardness of castings and forgings
- On flat or cylindrical work pieces
- Wide field of application within the automotive and aerospace industry
- Product quality control testing
- Steels, non-ferrous metals, stainless steels, heat treated materials
- Cemented carbides, ceramics
- Plastics and carbon testing

## Multi-Turret

- 8 position turret has all the objectives and indenters you need and eliminates the need to manually change indenters and objectives

## Clamping

- This optional clamping tool will ensure stability during the test process

## Sample Stage

- Large 300mm [11.8in] x 400mm [15.7in] stage supports large test pieces
- Anvil extension available for small or cylindrical parts

## Full Protection

- Steel casting provides full protection for production environments





# Advanced Functionality for Leading Industries

The global expertise of Buehler is strong as it now includes more than a century of experience from companies such as Wilson Instruments, Wolpert and Reichert. With the design and manufacturing of the UH4000 tester, the DiaMet software and test blocks all in-house by Buehler, system integration is guaranteed. Smart software functions help the user with standards traceability.

The trend toward tighter manufacturing tolerances and more advanced heat treatment processes for the automotive industries require hardness testing systems to be durable while maintaining precise control during critical test data generation. The system and its interfaces must be easy to use, yet flexible enough to meet the increasing demands in the industry.

The Wilson UH4000 delivers exceptional performance packaged in a reliable, easy to use system that offers superior accuracy and repeatability against low training requirements. With an optional DiaMet automation package this testing platform is capable of performing full automatic test cycles for heat treatment applications, such as Jominy testing.


## Aerospace



## Automotive



## Heat Treatment

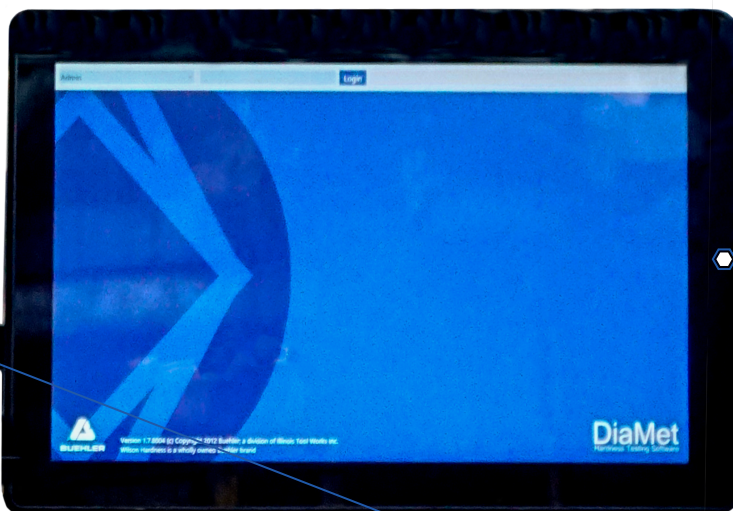

### DiaMet™ Software

- The most intuitive usability on the market
- Available on touchscreen or standard monitor
- Easy to launch with Quick Start to operate and perform hardness test

### Advanced Options

- Get a laser for easy test location targeting and a ringlight for best Brinell measurement accuracy
- Remove the safety shield for more complex parts

### Stage Movement

- Automatic and Manual vertical stage movement
- The 300mm [11.8in] x 400mm [15.7in] stage will carry your workpieces with ease

### Workspace Illumination

- Lighting provides full visibility on your workpieces underneath the turret



# DiaMet™ - Hardness Testing Made Easy



Navigation within the DiaMet™ Software is made easy by its clean design and is supported by simple and intuitive gestures. Virtual tabs on top of the screen let you navigate between Home, Program, Testing and Reporting. Comprehensive feedback is shown on the status bar, which make interactions clear and efficient. Being designed for touch panel use, with an entirely new look and feel, DiaMet is simple, useful, and smart to work with, easy to operate by touch, mouse or keyboard. DiaMet will perform your hardness test as fast as possible. Quick Start will enable you to perform your test after just two clicks after starting the software.

When ordering your UH4000 with DiaMet™ you can choose between a standard PC package or a Touchscreen package.

## Expert Control & Evaluation Software

DiaMet is optimized for evaluating Vickers, Rockwell, Brinell and Knoop measurements according to ISO 6506, ISO 6507, ISO 6508, ISO 4545 and ASTM E384, ASTM E10 and ASTM E18. A standard DiaMet feature is an automatic symmetry calculation for Vickers, Knoop and Brinell indents. This extra validation, with clear visual indication, helps to ensure the results conform to standards. Other features of DiaMet include:

### Tab Interface


Use the functions you need - fully configurable

### Flexible Layout

Show only what you want - maximize or minimize to your needs

### Touch Optimized

Use a stylus or your fingers to navigate or do the test

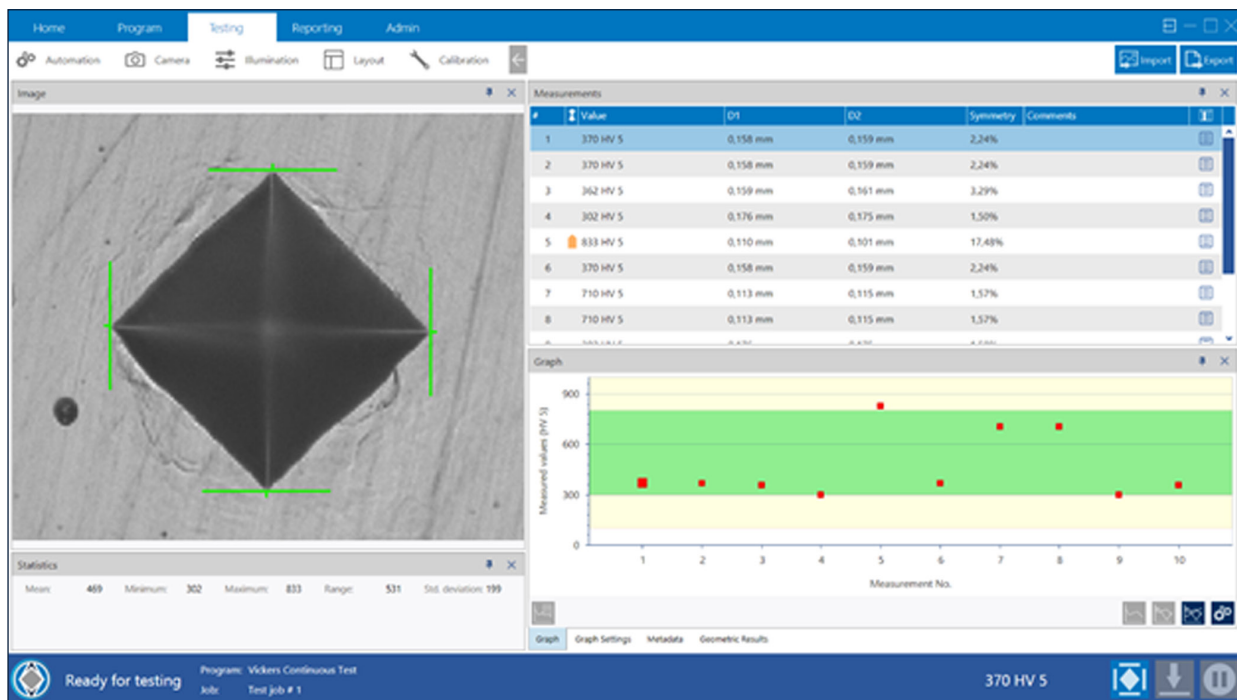

### Large Indent Image

Adjust the image window for easy remeasuring

### Metadata Input

Flexible Data input for test or batch specific results

### Tolerance Indicator

Direct visible feedback if your test is within tolerance or not





# Expert Control & Evaluation Software


Often a high level of automation comes with a high level of complexity both in setup and in operation. Breaking convention, the DiaMet software focuses on fast and simple operation to compensate for less experienced operators while still offering a high feature set and flexibility required by expert users. Once a required test program is set up, any operator can run the series of Vickers, Brinell, Rockwell or Knoop indents with a minimum of two clicks or two touches depending on the monitor options.

A standard DiaMet feature is an automatic symmetry calculation for Brinell, Vickers and Knoop. This extra validation, with clear visual indication, helps to ensure the results conform to standards.



## Auto-Illumination

Repeatable, repeatable, repeatable – the DiaMet™ software automatic illumination adjusts to the correct illumination level on whatever sample, wherever on the sample independent from material (steels, tool steels, carbides, coatings).

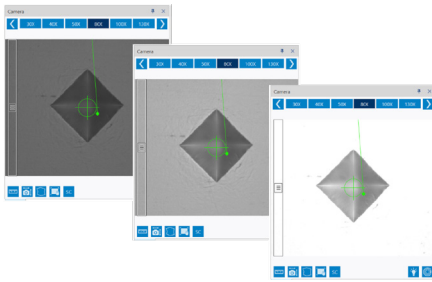


**Repeatable**  
Brightness & Contrast



## Auto-Focus

Astonishing- observe how the software finds focus from a distance as far away as 30mm or more. Enjoy the sheer Auto-Focus-speed when focusing at close range. The DiaMet software Auto-Focus algorithm sets new standards.

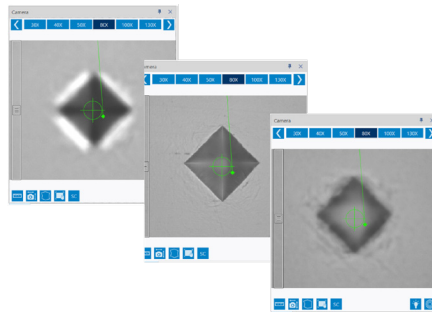


**Repeatable**  
Sharpness



## Auto-Measurement

Manual positioning of filar lines is no longer required with the DiaMet software's refined measurement algorithm. Maintain control by switching to manual measure mode and adjust measurements by touch or mouse. Enable the automatic indent symmetry check on demand for further standards confirmation.

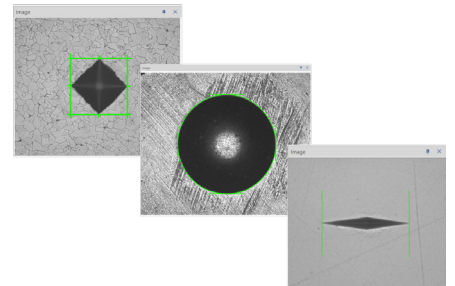

**Repeatable**  
Results



## Solutions for NADCAP Accreditation

The National Aerospace and Defense Contractors Accreditation Program (NADCAP) is a global cooperative accreditation program for aerospace, defense and related industries. The program develops industry-wide manufacturing processes that are applied by aerospace accredited manufacturers and suppliers. These processes can be found in different areas of material-recovery, such as coating, heat treatment and welding processes as well as inspection methods, such as hardness testing and microstructural analysis. Buehler's experience, expertise and robust equipment help suppliers and manufacturers meet the aerospace industry's NADCAP accreditation.

Buehler has the team to assist NADCAP accredited customers. As part of the ITW Test & Measurement Group, Buehler maintains its own service department of experienced service engineers and also coordinates verification with Instron and an experienced distributor service team. We have global presence and global experience in working with customers to meet NADCAP audits.



# Application Cases for the UH4000 Series

Wilson UH4000 Universal Hardness Testers are the perfect fit for your production environment. The following examples are highlighting the capabilities for hardness testing on components using the Wilson UH4000 series testers.


## Castings



Wilson UH4750 with AlMgSi casting



The Wilson UH4750 and UH4250 work perfectly for all kind of casted components, like engine and transmission cases. Brinell testing is carried out with HBW2.5/62.5 or HBW5/250 test scales, when using Al based castings, and HBW2.5/187.5 or HBW5/750 test scales, when using Fe based castings.

The test location can be targeted with the laser or the 2.5x objective, optionally equipped with the ringlight for better measurement accuracy.

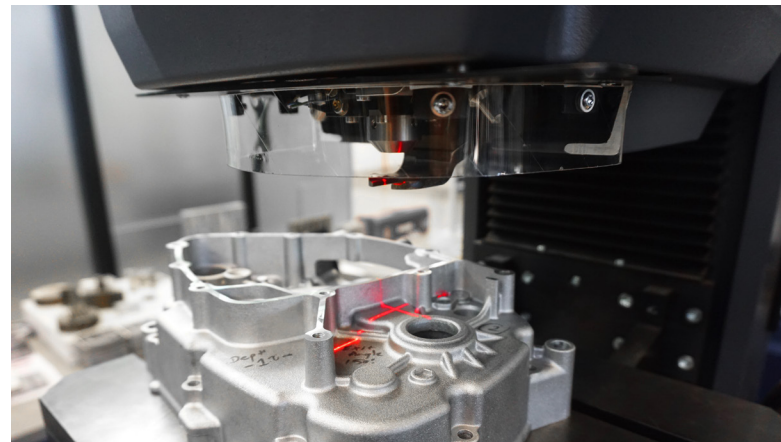

The target laser helps to position the part correctly on the big workpiece stage.

Due to the low hardness of Al alloys and casted materials, Brinell indents can be very deep and the plastic deformation zone is large which can lead to challenges for the correct measurement of such indents. The newly developed ringlight will ensure that the Brinell indent gets measured correctly and as accurate and repeatable as possible.

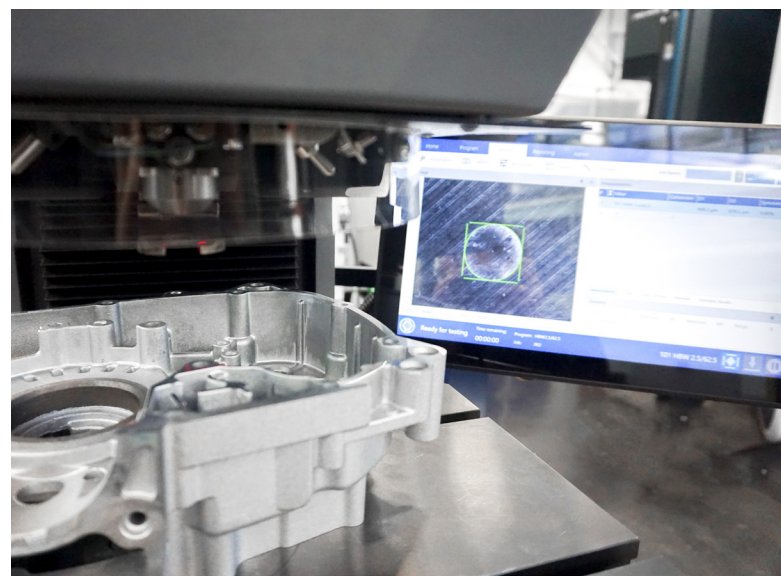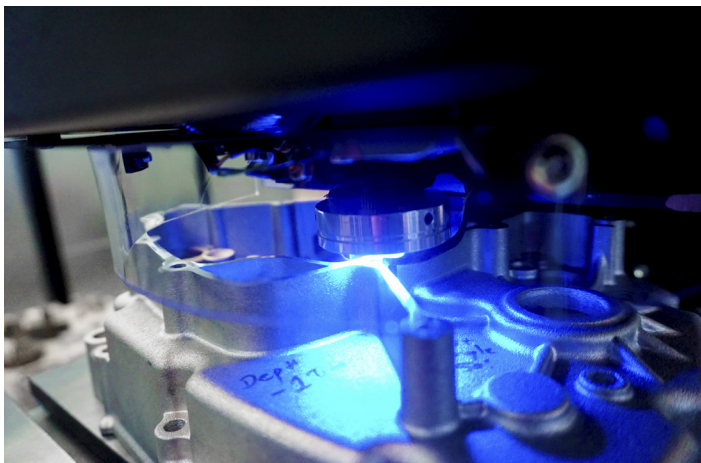



# Heat Treated Components




The UH4000 comes with an anvil extension to enable testing of smaller or cylindrical parts.


Heat treatment processes, like induction heat treatment, are processes to harden components from the outside to increase wear resistance, but keep the part flexible in the inside. These heat treatments are fast to execute in production environments.

It is key to check the hardness after the heat treatment to ensure the part was processed correctly. In many cases, Rockwell hardness scales are used to perform the hardness checks.


The UH4000 can be equipped with a clamping device that secures the part before and during the testing. Rockwell testing in combination with the clamping device enables the Rockwell fast mode. In this mode, the testing will be performed automatically without operator influence.

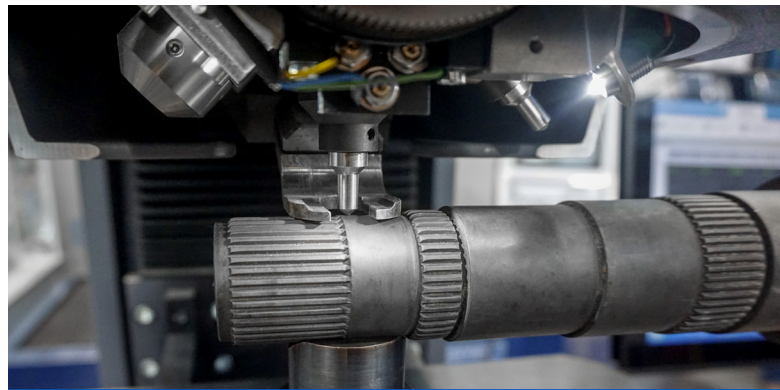

The safety shield can get taken off to ensure full accessibility for more complex part geometries.

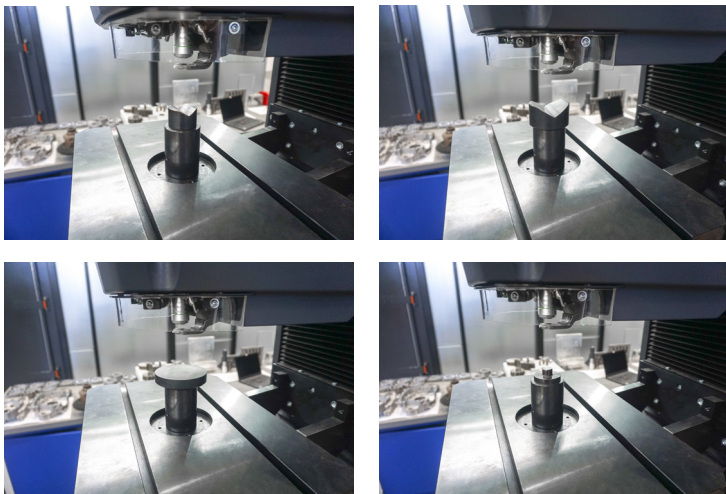

Different test anvils are available to support smaller or cylindrical parts as well.

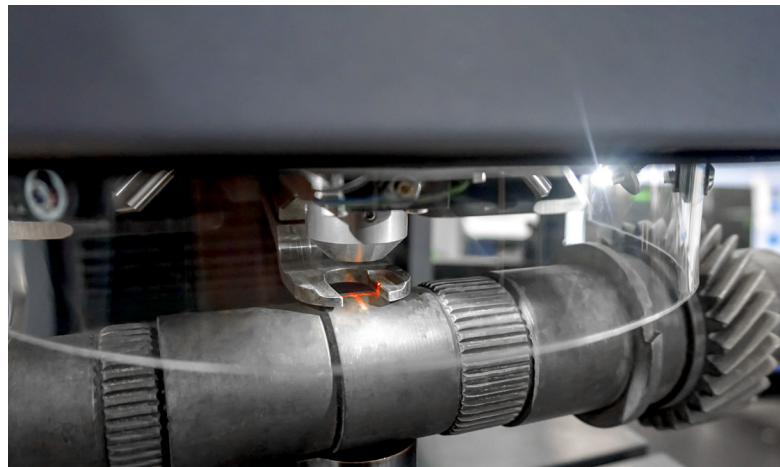

The workspace illumination helps the operator to position the parts with ease and to have full visibility in dark environments as well.



Automatic and manual stage movement are available on the Wilson UH4000 hardness testers by default, ensuring easy component movement of small as well as big and heavy parts.

# Technical Specifications

	UH4250	UH4750
Scales	HV 0.5 - HB 10/250	HV 3 - HBW 10/750
Turret	8 positions for objectives and indenters	
Indenters (Optional)	Brinell 1mm, 2.5mm, 5,0mm and 10,0mm carbide balls, Rockwell diamond cone, 1/16", 1/8", 1/4", 1/2" carbide ball indenters, Vickers diamond and Knoop diamond	
Objectives Long Working Distance (Optional)	0.5x (optional with ring light), 5x, 10x, 20x, 40x, 50x	
Optics	5-megapixel USB 3 digital camera, with digital zoom and autofocus	
Test Loads	0.5-250 kgf	3-750 kgf
Test Load Type	Closed loop	
Test Standards	Brinell (ISO 6506-1, ASTM E10), Vickers (ISO 6507-1, ASTM E92), Rockwell (ISO 6508-1, ASTM E18), Knoop (ISO4545-1, ASTM E384), Plastic testing ball indentation (ISO 2039-1, 2039-2)	
Z Spindle	Manual hand wheel and automatic Z axis drive	
Maximum Specimen Height/Weight	300 mm (11.8 in), 70 kg (154 lb)	
Test Stage Dimensions	T-slot stage with 12mm slot width, 300mm [11.8in] x 400mm [15.7in]	
Machine Dimensions (L x W x H)	704 Mm (28 in) x 534 mm (21 in) x 995 mm (39.2 In)	
Machine Net Weight	300 kg (660 lb)	
Power	100 - 240VAC, 50-60Hz	

## Wilson® Test Blocks & Indenters

Wilson test blocks and indenters are provided for a wide range of Vickers & Knoop, as well as Rockwell® and Brinell applications. Certified to a range of international standards including ASTM and ISO, we manufacture test blocks in-house to ensure the highest quality test reference standards available. Test blocks and indenters are certified using the latest standardization and optical measuring technology. Buehler operates its own calibration laboratory, traceable to NIST and are accredited to ISO/IEC 17025 by A2LA®. For more information on the test blocks and indenters please see the current catalog or visit [www.buehler.com](http://www.buehler.com).





# System Configurations


Select either the UH4250 or UH4750 with either standard or touchscreen monitor and continue on to create a customized Universal Hardness tester

## Main Unit



### Wilson UH4250

- Load Range 0.5-250kgf, Standard Monitor 24" W4250
- Load Range 0.5-250kgf, Touchscreen 15" W4251



### Wilson UH4750

- Load Range 3 - 750kgf, Standard Monitor 24" W4750
- Load Range 3 - 750kgf, Touchscreen 15" W4751

## Configure Turret

Consult with your Buehler Sales engineer to select objectives, indenters and accessories that meet your application.



### Objectives

- |          |   |
|----------|---|
| W4100X2  | 2.5x Objective, optional with Ringlight |
| W4100X5  | 5x Objective                            |
| W4100X10 | 10x Objective                           |
| W4100X20 | 20x Objective                           |
| W4100X40 | 40x Objective                           |
| W4100X50 | 50x Objective                           |



### Laser


- |        |                   |
|--------|-------------------|
| W4100L | Positioning Laser |
|--------|-------------------|

### Indenters

- |           |  |
|-----------|--|
| W4100K    | Knoop Indenter with turret adapter         |
| W4100V    | Vickers Indenter with turret adapter       |
| W4100B1   | Brinell Indenter 1mm with turret adapter   |
| W4100B2   | Brinell Indenter 2.5mm with turret adapter |
| W4100B5   | Brinell Indenter 5mm with turret adapter   |
| W4100B10  | Brinell Indenter 10mm with turret adapter  |
| W4100R120 | Rockwell Diamond Cone Indenter             |
| W4100R16  | Rockwell Indenter 1/16" Ball               |
| W4100R8   | Rockwell Indenter 1/8" Ball                |
| W4100R4   | Rockwell Indenter 1/4" Ball                |
| W4100R2   | Rockwell Indenter 1/2" Ball                |

## Accessories

### Ring Light



Ringlight for 2.5x objective (improves reading of soft Brinell indents)

W4100RL  
\*Requires W4100X2 2.5x Objective


### Auto Clamping Device



The unique clamping device for the UH4000 series hardness testers ensures that workpieces will be fixed properly during testing. The device is designed to adapt different types of clamping forks.  
Clamping width: 35mm [1.37in]

W4100CL

### Workbench



Workbench with Drawers  
1000 x 700 x 800mm [30 x 27 x 31in]  
with spindle hole

944872

### Anvils



V anvil for max. 45mm diameter cylindrical workpieces  
740096



10mm spot anvil for small workpieces  
740160



Test anvil flat 80mm diameter  
740191



V anvil for max. 85mm diameter cylindrical workpieces  
740095




Auto-leveling anvil Planoflex - flat 60mm diameter  
740587



Test anvil flat 190mm diameter  
740101

# Buehler Worldwide Locations

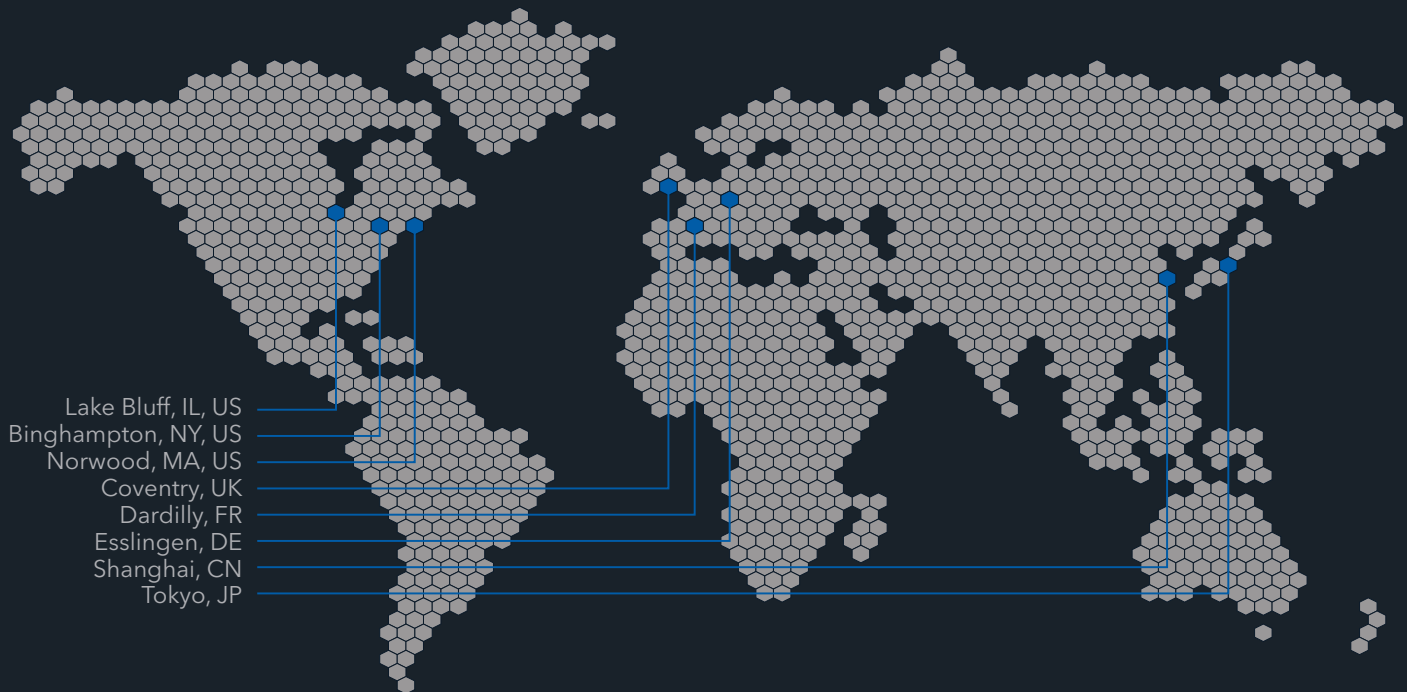

Solutions for Materials Preparation, Testing and Analysis

## **BUEHLER Worldwide Headquarters**

### **BUEHLER North and South America**

41 Waukegan Road, Lake Bluff, Illinois 60044

**P:** +1 847 295 6500 | 800 BUEHLER (800 283 4537)

**W:** [www.buehler.com](http://www.buehler.com) | **E:** [info@buehler.com](mailto:info@buehler.com)  
[shop.buehler.com](http://shop.buehler.com)

### **European Headquarters**

#### **BUEHLER Germany - Esslingen**

ITW Test & Measurement GmbH

**P:** +49 (0) 711 4904690-0

**W:** [www.buehler-met.de](http://www.buehler-met.de) | **E:** [info.eu@buehler.com](mailto:info.eu@buehler.com)  
[www.metallographie.biz](http://www.metallographie.biz)

#### **BUEHLER France - Dardilly**

**P:** +33 (0) 800 89 73 71

**W:** [www.buehler.fr](http://www.buehler.fr) | **E:** [info.eu@buehler.com](mailto:info.eu@buehler.com)  
[www.metallographie.fr](http://www.metallographie.fr)

#### **BUEHLER United Kingdom - Coventry**

**P:** +44 (0) 800 707 6273

**W:** [www.buehler.co.uk](http://www.buehler.co.uk) | **E:** [info.eu@buehler.com](mailto:info.eu@buehler.com)  
[www.metallography.biz](http://www.metallography.biz)

## **Asia Headquarters**

### **BUEHLER China - Shanghai**

ITW Test & Measurement (Shanghai) Co., Ltd.

**P:** +86 400 111 8683 | **F:** +86 21 6410 6671

**W:** [www.buehler.cn](http://www.buehler.cn) | **E:** [info.cn@buehler.com](mailto:info.cn@buehler.com)

### **BUEHLER Asia-Pacific**

**P:** +86 400 111 8683

**E:** [info.asia@buehler.com](mailto:info.asia@buehler.com)

### **BUEHLER Japan**

**P:** +81 03 5439 5077 | **F:** +81 03 3452 7220

**W:** [www.buehler.jp](http://www.buehler.jp) | **E:** [info.japan@buehler.com](mailto:info.japan@buehler.com)



CELEBRATING **75** YEARS  
OF PARTNERSHIP

