

ElectroPuls™ | E1000 All-Electric Dynamic Test Instrument

The ElectroPuls™ E1000 is a state-of-the-art, all-electric test instrument designed for dynamic and static testing on a wide range of materials and components. It includes Instron® advanced digital control electronics, Dynacell™ load cell, Console software, and the very latest in testing technology – hassle-free tuning based on specimen stiffness, electrically operated crosshead lifts, a T-slot table for flexible test set ups, and a host of other user-orientated features. Powered from a single-phase supply it requires no additional utilities for basic machine operation (for example, pneumatic air, hydraulics, or water).

Features

- Patented, oil-free linear motor technology for clean conditions
- Designed for both dynamic and static testing on a variety of materials and components
- High dynamic performance, capable of operating at over 100 Hz
- ±1000 N dynamic load capacity and ±710 N static load capacity
- Electrically powered from single phase main supply, no need for hydraulic or pneumatic air supplies
- Temperature-controlled air-cooling system
- High-stiffness, precision-aligned twin column load frame with actuator in upper crosshead
- Versatile T-slot table for regular and irregular grips and specimens
- Compact instrument - frame requires less than 0.15 m² (1.6 ft²) of desk space

Hardware and Software Interfaces Designed to Put You in Control

- Console software control interface - engineered with Instron's knowledge of machine usability
- Rigidly mounted control pod with critical controls and emergency stop at your fingertips
- Electrically powered crosshead lift system with manual lever clamps for ease of test space adjustment
- System status indicator shows system conditions (off, on, emergency stop, and fault)

Hidden Technology Designed to Improve Your Test

- Patented stiffness-based loop tuning system
- Unique actuator bearing system maintains load string alignment when offset or lateral loads are induced by specimens or fixtures
- An optical encoder for precise digital extension control and a dedicated position channel for set up and end of test
- Digital controller based on the industry's most advanced controller
- Dynacell advanced load cell technology for faster testing and reduction of inertial errors

A High Level of Versatility

- Readily adjustable test space to suit a wide variety of specimens, grips, fixtures, and accessories
- 60 mm (2.36 in) stroke for a wide range of tests, as well as ease of specimen set up
- Offset diagonal column configuration provides optimum access to the test area
- Compatible with WaveMatrix™, Bluehill® Universal* and Application Specific software
- Compatible with a large range of grips, fixtures, chambers, saline baths, video extensometers, and other accessories
- Optional accessory kit to allow frame to be mounted in horizontal orientation for ease of testing with imaging systems and microscopes

* Only supported in desktop mode




Specifications

Dynamic Capacity	±1000 N (±225 lbf)
Static Capacity	±710 N (±160 lbf)
Stroke	60 mm (2.36 in)
Load Weighing Accuracy	±0.5 % of indicated load or ±0.005 % of load cell capacity, whichever is greater
Daylight Opening	610 mm (24 in) maximum with actuator at mid stroke
Configuration	Diagonal twin-column with actuator in upper crosshead
Mounting	Tabletop: Vertical (Horizontal with optional mounting kit)
Lift and Locks	Electrically powered lifts with manual lever clamps
Load Cell	±2 kN Dynacell™ mounted to base
Weight	92 kg (202 lb) [frame only] 40 kg (88 lb) [controller]
Electrical Supply	100 VAC to 140 VAC 20A single phase 50/60 Hz 220 VAC to 240 VAC 10A single phase 50 Hz
Cooling	Temperature-controlled air cooling
Operating Temperature	+10 to +30 °C (+50 to +86 °F)

INTERFACES

Actuator	M6 × 1 right hand central thread 3 × M6 on 57 mm PCD
T-Slot Table	M6 × 1 right hand central thread 3 × M6 holes on 57 mm PCD 6 × M10 holes on 100 mm PCD 4 × M10 holes on a 280 mm x 90 mm accessory rectangle 4 × M6 T-slots spaced 80 mm from center

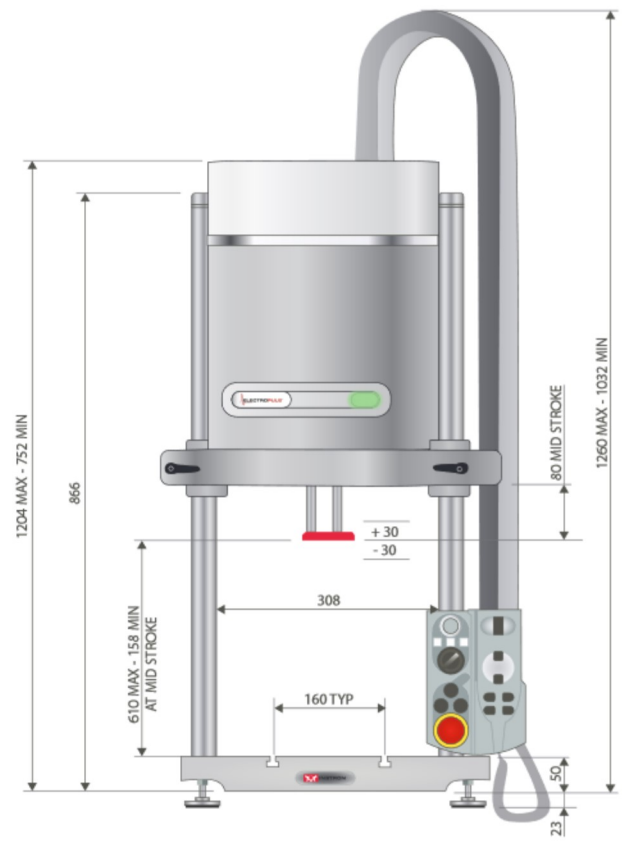


E1000 dimensions front view

Accessories

1300-311	High Stiffness Support Table
1300-151	Horizontal mounting kit for ElectroPuls™ E1000 test instrument
1300-301	Safety Screen for E1000 test instrument
2742-102	±1 kN (±225 lbf) fatigue-rated mechanical wedge grip
2742-103	±1 kN (±225 lbf) fatigue-rated pneumatic wedge grip
2718-013	Pneumatic grip air kit for dynamic systems
CP114160	±3 kN (±675 lbs) Compression Platens



E1000 test instrument in horizontal configuration

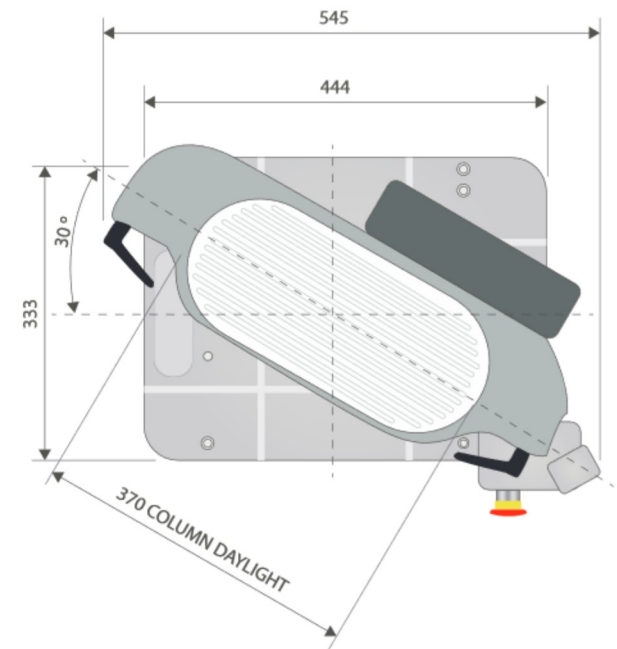

E1000 dimensions plan view

www.instron.com


Worldwide Headquarters
825 University Ave, Norwood, MA 02062-2643, USA
Tel: +1 800 564 8378 or +1 781 575 5000

European Headquarters
Coronation Road, High Wycombe, Bucks HP12 3SY, UK
Tel: +44 1494 464646

Instron Industrial Products
900 Liberty Street, Grove City, PA 16127, USA
Tel: +1 724 458 9610

Instron is a registered trademark of Illinois Tool Works Inc. (ITW). Other names, logos, icons and marks identifying Instron products and services referenced herein are trademarks of ITW and may not be used without the prior written permission of ITW. Other product and company names listed are trademarks or trade names of their respective companies. Copyright © 2014 Illinois Tool Works Inc. All rights reserved. All of the specifications shown in this document are subject to change without notice.

ElectroPulsE1000_PODV6